


SYSTEM

- Designed for Medium sized desk or table with up to 4 presenters.
- Provides attractive medium sized “pool” of light for talent zones.
- Light weight fixtures can be hung from suspended ceilings.
- Available in non-dimming and dimming configurations.

LAYOUT

This package is intended for up to 4 people around one side of a medium sized table or in a small interview area.

Three fixtures are used as backlights, one centered over each of the outside positions and the third aimed between the 2 center positions. All should be at a height of about 8'. Two are used as close keys crossed about 6' from the 2 center positions. The two remaining fixtures are used as

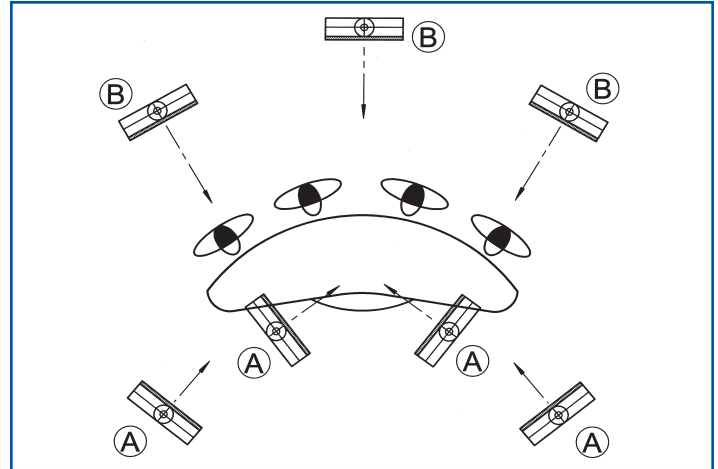

outside fills, crossed from just outside the 2 outside positions at about 6' to 8' away. All four front lights are to hang 7'-8' off the ground. Adjustable hangers are available if required.

COMPONENTS

120 Volt Non-Dimming (N4PDS-1)

Type	Qty	Model	Description
(A)	4	P220-455BX-120	Power-Key, Focusable Non-Dim Fixture
	4	ZS-P220-W	Wide Zone Control Screen
(B)	3	P110-255BX-120	Power Key, Focusable Non-Dim Fixture
	3	ZS-P110-W	Wide Zone Control Screen
	22	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

120 Volt Dimming (D4PDS-1)

Type	Qty	Model	Description
(A)	4	P220-455BX-D/PM-120	Power-Key, Focusable w/ Phase Control Dim
	4	ZS-P220-W	Wide Zone Control Screen
(B)	3	P110-255BX-D/PM-120	Power Key, Focusable w/ Phase Control Dim
	3	ZS-P110-W	Wide Zone Control Screen
	*1	DC-V-I0	12 Channel Vista 10 Control
	*2	DC-4X600	VID Strip 4 circuit X 600 watts
	*2	CB-D-GG15	15' Power Cable (GTL Plug)
	*1	CB-C-DMX25	25' DMX Cable
	*1	CB-C-DMX50	50' DMX Cable
	22	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

230 Volt Non-Dimming (N4PDS-2)

Type	Qty	Model	Description
(A)	4	P220-455BX-230	Power-Key, Focusable Non-Dim Fixture
	4	ZS-P220-W	Wide Zone Control Screen
(B)	3	P110-255BX-230	Power Key, Focusable Non-Dim Fixture
	3	ZS-P110-W	Wide Zone Control Screen
	22	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

230 Volt Dimming (D4PDS-2)

Type	Qty	Model	Description
(A)	4	P220-455BX-DMX-230	Power-Key, Focusable w/ DMX Dimming
	4	ZS-P220-W	Wide Zone Control Screen
(B)	3	P110-255BX-DMX-230	Power Key, Focusable w/ DMX Dimming
	3	ZS-P110-W	Wide Zone Control Screen
	22	L-BX55/30	55w Lamps, 3000K
	*1	DC-V-I0	12 Channel Vista 10 Control
	*4	CB-C-DMX25	25' DMX Cable
	*3	CB-C-DMX50	50' DMX Cable

Note: Adjustable hangers may be required