

LIGHTING SYSTEMS Chromakey Wall w/ LED Only


SYSTEM

- Fully illuminate an 8' x 10' chromakey wall and presenter.
- Additional lighting for backlight accent on Talent will not affect chromakey.
- Light weight fixtures can be hung from suspended ceilings.

LAYOUT

This package is designed to light a single-talent position and small Chromakey wall.

Fixtures are positioned in a triangular pattern with the talent facing the apex of the triangle. If mounted properly an aggregate light level of 75-100 foot candles above the ambient light will fill the talent zone. With all fixtures "full-on," power consumption is less than 220 watts. Adjustable hangers are available if required.

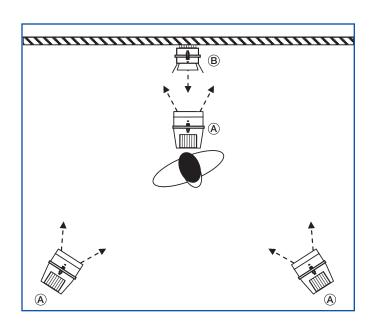

COMPONENTS

120 TO 230 Volt Dimming (DCWS-L-OB)

Qty	Model	Description
3	VF050-32K-OB/DMX	Vidfill, LED Soft Light w/OB or DMX Dim Fixture
3	GF-VF050	Gel Frame
1	LV-050-F-32K-OB	Little Vid Focusable, LED w/OB Dim Fixture
1	BD-LV050-F	Barn Door
1	GF-LV050S	Gel Frame
	3	3 VF050-32K-OB/DMX 3 GF-VF050 1 LV-050-F-32K-OB 1 BD-LV050-F

120 TO 230 Volt Dimming (DCWS-L-DMX)

Type	Qty	Model	Description
A	3	VF050-32K-OB/DMX	Vidfill, LED Soft Light w/OB or DMX Dim Fixture
	3	GF-VF050	Gel Frame
B	1	LV-050-F-32K-DMX	Little Vid Focusable, LED w/DMX Dim Fixture
	1	BD-LV050-F	Barn Door
	1	GF-LV050S	Gel Frame
*	1	DC-ETC-1296	12 Channel ETC SmartFade® Console **
*	3	CB-C-DMX25	25´ DMX Cable
*	1	CB-C-DMX50	50' DMX Cable

© 2016 VIDESSENCE

*These items may not be required if you have an existing dimming system. ** DC-ETC-2496, 24 Channel ETC SmartFade® Console is also available.