

# **LIGHTING SYSTEMS Single or Double Person MOD-COM 5**

### SYSTEM

- Illuminate a single desk with two presenters.
- Creates a high level "pool" of medium zone lighting.
- Excellent for:
  - Bureaus/Newsrooms or small presentation studios.
  - Distance learning environments.
  - · Large Chromakey wall.
- Light weight fixtures can be hung from suspended ceilings.
- Available in non-dimming and dimming configurations.

## LAYOUT

#### This package is designed to light a single small desk with 1 or 2 Talent positions.

Single Modular unit is used for backlight for both positions from no more that 6' away. Two Modular Double units are crossed (see illustration) on the Talent positions, 7' from talent and 7'-8' off of the floor. Adjustable hangers are

### COMPONENTS

#### 120 Volt Non-Dimming (NDFP7-1)

Type Qty Model (A)1 M110-255BX-120 Description

- Modular Non-Dim Fixture
- 2 M110-255BX2-120 6
- Modular Non-Dim Fixture 55w Lamps, 3000K
  - L-BX55/30 Note: Adjustable hangers may be required

#### 230 Volt Non-Dimming (NDFP7-2)

Type Qty Model


6

(B)

- 1 M110-255BX-230 (A)
- B 2

Description Modular Non-Dim Fixture

- M110-255BX2-230 Modular Non-Dim Fixture
- L-BX55/30 55w Lamps, 3000K Note: Adjustable hangers may be required

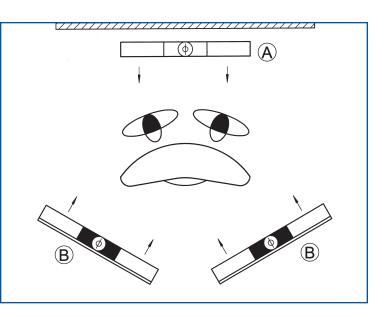

available if required. Light level will average 90-120 fc in the talent zone and on the wall. With all fixtures "full on," power consumption will be less than 600 watts.

Description

Modular w/Phase Control Dim

Modular w/Phase Control Dim

12 Channel Vista 10 Control

15' Power Cable (GTL Plug)

VID Strip 4 circuit X 600 watts

### 120 Volt Dimming (DFP7-1)

Type Qty Model

**B** 

- (A)1 M110-255BX-D/PM-120
  - 2 M110-255BX2-D/PM-120
  - \*1 DC-V-I0
  - \*1 DC-4X600
  - \*1 CB-C-DMX50 50' DMX Cable
  - \*1 CB-D-GG15
  - 6 L-BX55/30

55w Lamps, 3000K Note: Adjustable hangers may be required

### 230 Volt Dimming (DFP7-2)

| Туре | Qty | Model                                    | Description                 |
|------|-----|--|-----------------------------|
| A    | 1   | M110-255BX-DMX-230                       | Modular w/ DMX Dimming      |
| B    | 2   | M110-255BX2-DMX-230                      | Modular w/ DMX Dimming      |
|      | 6   | L-BX55/30                                | 55w Lamps, 3000K            |
|      | *1  | DC-V-10                                  | 12 Channel Vista 10 Control |
|      | *2  | CB-C-DMX25                               | 25´ DMX Cable               |
|      | *1  | CB-C-DMX50                               | 50´ DMX Cable               |
|      |     | Note: Adjustable hangers may be required |                             |

© 2008 VIDESSENCE

\* These items may not be required if you have an existing dimming system.