



# BABY BASE Series B084-242TT

## SYSTEM

Maximum 84 watt compact fluorescent unit for studio back lighting or location lighting applications. Lamps in the fixture may alternate between (2) 26, 32 or 42 watt Triple Tube fluorescent lamps. Wide Zone Screen and Barn Doors are available to adjust the beam angle. All 230 volt fixtures are RoHS compliant. UL/CUL/CE Listed

## SPECIFICATION

**Housing:** Constructed of .063 formed aluminum then coated with black textured TGIC polyester coat finish.

**Reflector:** Formed .020 high purity aluminum (99.9%) reflector material with 95% reflectance finish.

**Socket:** Molded white high strength thermoplastic with push wire connections and 18 gauge leads. Model number 285-QX 4-pin accepts 26, 32 and 42 watt triple tube lamps.

**Electrical:** Unit contains (1) 2-lamp ballast to drive two 26, 32 or 42 watt lamps for a maximum of 84 lamp watts per fixture. Power factor shall be  $>.97$  with a class A sound rating and THD of  $<20\%$ . Power entry on unit includes on/off switch, fuse holder with fuse (for protection against power surges), spare fuse and IEC connector. The 0-10 Analog Dim unit is provided with integral dimming control.

**Mounting:** Provided with .125 welded aluminum yoke. Unit may rotate vertically through the yoke and horizontally through a pipe clamp for ease of focus, and may be locked into place.

### Fixture Includes:


- (2) 42 watt Triple Tube Lamps
- (1) 2-lamp Ballast
- 16' power cord with NEMA5-15 (3) prong plug
- (1) C-Clamp or 5/8" Stand Adapter (Specify One)

## LAMPS

42 watt CFTR42W/GX24Q/830  
3000K, 10,000 Hours Lamp Life  
CRI: 82  
Light output: 3200 LM/Lamp

## OPTIONS (Must Specify Each)

Ballast	120/230 VAC50/60Hz HPF Electronic
Mounting	2" O.D.C-Clamp 5/8 Stand Adapter
Lamps	3000K (Included as Standard) 4100K
Barn Doors	#BD-B084
Zone Screen	Wide Zone Screen #ZS-B084-W

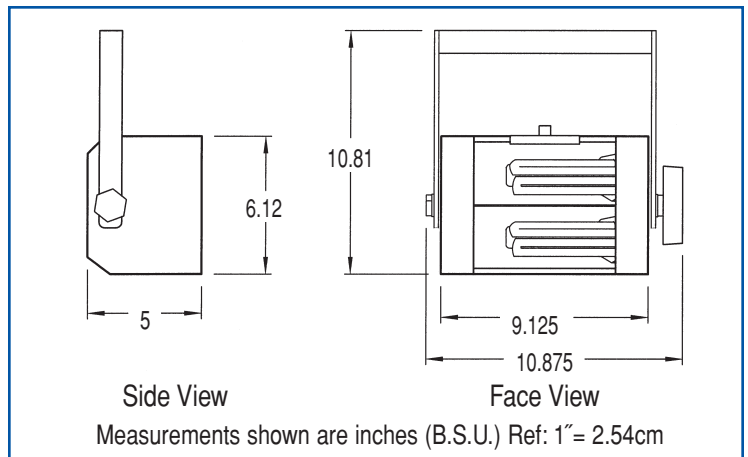

### MODEL #

B084-242TT-ND	Non Dim
B084-242TT-OB	On Board Dim
B084-242TT-D/PM*	Phase Control
* Not available in 230 volt.	

### WEIGHT

	Lbs	Kg	<b>DIMENSIONS</b>	Inches	Cm
Complete	4.5	2.0	Length	10.88	27.6
			Height	10.81	27.5
			Width	5.0	12.7

### PHOTOMETRICS

	Distance				
	3ft./.91m	6ft/1.83m	9ft/2.74m	12ft/3.66m	15ft/4.57m
FC	158	40	18	10	6
Lux	1701	431	194	108	65