


### SYSTEM

- Fully illuminate an 8' x 10' chromakey wall and presenter.
- Additional lighting for backlight accent on Talent will not affect chromakey.
- Light weight fixtures can be hung from suspended ceilings.
- Available in non-dimming and dimming configurations.

### LAYOUT

This package is designed to surround a single Talent position with fixtures in a low ceiling environment.

Fixtures are suspended from the ceiling by scissor clips in a triangular pattern with the Talent facing the apex of the triangle. If mounted in the proper configuration an aggregate light level of 75-100 foot candles above the ambient light will

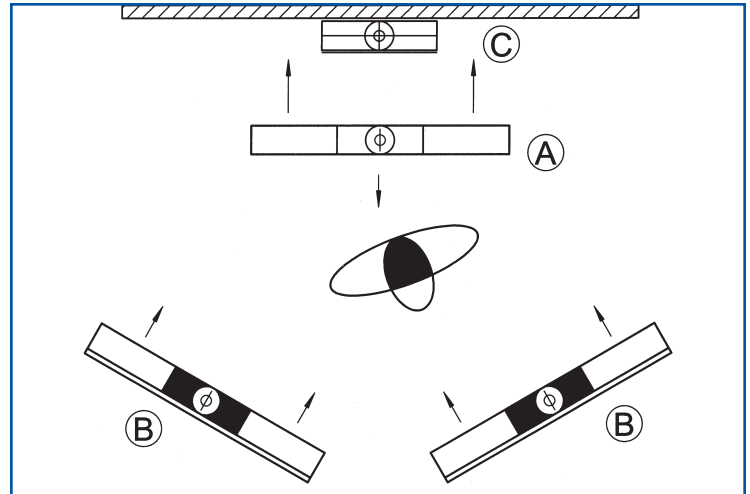

fill the Talent zone. With all fixtures "full on," power consumption will be less than 700 watts. Adjustable hangers are available if required.

### COMPONENTS

#### 120 Volt Non-Dimming (NCWS-1)

Type	Qty	Model	Description
(A)	1	M110-255BX-120	Modular Non-Dim Fixture
(B)	2	M110-255BX2-120	Modular Non-Dim Fixture
(C)	1	P110-255BX-120	Power Key, Focusable Non-Dim Fixture
	1	ZS-P110-W	Wide Zone Control Screen
	8	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

#### 120 Volt Dimming (DCWS-1)

Type	Qty	Model	Description
(A)	1	M110-255BX-D/PM-120	Modular w/Phase Control Dim
(B)	2	M110-255BX2-D/PM-120	Modular w/Phase Control Dim
(C)	1	P110-255BX-D/PM-120	Power Key, Focusable w/ Phase Control Dim
	1	ZS-P110-W	Wide Zone Control Screen
	*1	DC-V-I0	12 Channel Vista 10 Control
	*1	DC-4X600	VID Strip 4 circuit X 600 watts
	*1	CB-D-GG15	15' Power Cable (GTL Plug)
	*1	CB-C-DMX50	50' DMX Cable
	8	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

#### 230 Volt Non-Dimming (NCWS-2)

Type	Qty	Model	Description
(A)	1	M110-255BX-230	Modular Non-Dim Fixture
(B)	2	M110-255BX2-230	Modular Non-Dim Fixture
(C)	1	P110-255BX-230	Power Key, Focusable Non-Dim Fixture
	1	ZS-P110-W	Wide Zone Control Screen
	8	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

#### 230 Volt Dimming (DCWS-2)

Type	Qty	Model	Description
(A)	1	M110-255BX-DMX-230	Modular w/DMX Dimming
(B)	2	M110-255BX2-DMX-230	Modular w/DMX Dimming
(C)	1	P110-255BX-DMX-230	Power Key, Focusable w/ DMX Dimming
	1	ZS-P110-W	Wide Zone Control Screen
	8	L-BX55/30	55w Lamps, 3000K
	*1	DC-V-I0	12 Channel Vista 10 Control
	*3	CB-C-DMX25	25' DMX Cable
	*1	CB-C-DMX50	50' DMX Cable

Note: Adjustable hangers may be required