


SYSTEM

- Small desk/Single camera/Single Talent lighting solution.
- Light weight fixtures can be hung from suspended ceilings.
- Available in non-dimming and dimming configurations.

LAYOUT

This package of equipment is designed to light a single small desk with 1 presenter for a single camera.

The Type B backlight should be no more than 6' above the Talent's head. The front Type A fixtures are designed to be used 6'-8' from the talent and 7'-8' off the ground. Adjustable hangers are available if required. If mounted in the proper configuration an aggregated light level of 60-80 foot candles above ambient light will fill the Talent zone. With all fixtures "full-on," power consumption is less than 650 watts.

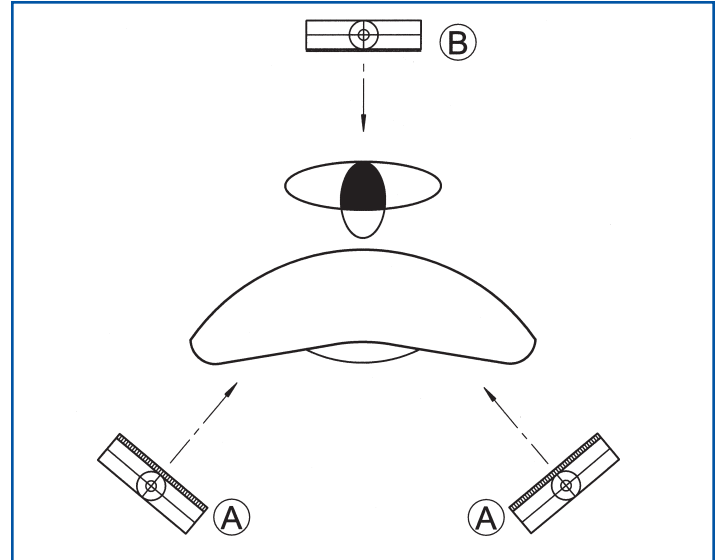

COMPONENTS

120 Volt Non-Dimming (NSPS-1)

Type	Qty	Model	Description
Ⓐ	2	P110-255BX-120	Power Key, Focusable Non-Dim Fixture
	2	ZS-P110-W	Wide Zone Control Screen
Ⓑ	1	P055-155BX-120	Power Key, Focusable Non-Dim
	1	ZS-P055-W	Wide Zone Control Screen
	5	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

120 Volt Dimming (DSPS-1)

Type	Qty	Model	Description
Ⓐ	2	P110-255BX-D/PM-120	Power Key, Focusable w/ Phase Control Dim
	2	ZS-P110-W	Wide Zone Control Screen
Ⓑ	1	P055-155BX-D/PM-120	Power Key, Focusable w/ Phase Control Dim
	1	ZS-P055-W	Wide Zone Control Screen
	5	L-BX55/30	55w Lamps, 3000K
	*1	DC-V-I0	12 Channel Vista 10 Control
	*1	DC-4X600	VIDstrip 4 circuit X 600 watts
	*1	CB-D-GG15	15' Power Cable (GTL Plug)
	*1	CB-C-DMX50	50' DMX Cable

Note: Adjustable hangers may be required

230 Volt Non-Dimming (NSPS-2)

Type	Qty	Model	Description
Ⓐ	2	P110-255BX-230	Power Key, Focusable Non-Dim Fixture
	2	ZS-P110-W	Wide Zone Control Screen
Ⓑ	1	P055-155BX-230	Power Key, Focusable Non-Dim Fixture
	1	ZS-P055-W	Wide Zone Control Screen
	5	L-BX55/30	55w Lamps, 3000K

Note: Adjustable hangers may be required

230 Volt Dimming (DSPS-2)

Type	Qty	Model	Description
Ⓐ	2	P110-255BX-DMX-230	Power Key, Focusable w/ DMX Dimming
	2	ZS-P110-W	Wide Zone Control Screen
Ⓑ	1	P055-155BX-DMX-230	Power Key, Focusable w/ DMX Dimming
	1	ZS-P055-W	Wide Zone Control Screen
	5	L-BX55/30	55w Lamps, 3000K
	*1	DC-V-I0	12 Channel Vista 10 Control
	*2	CB-C-DMX25	25' DMX Cable
	*1	CB-C-DMX50	50' DMX Cable

Note: Adjustable hangers may be required